


Tangra™ S Pro HD Black

425-445W Full Black

N-type High Density
Bifacial Double Glass Mono Module

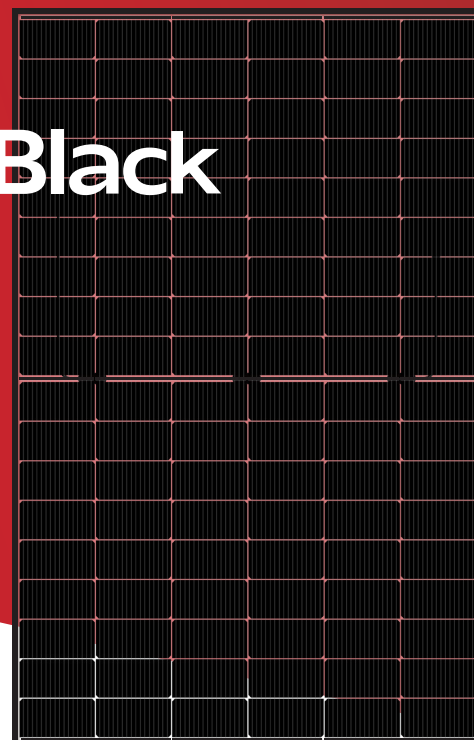

Bifacial technology enables additional energy harvesting from rear side (up to 30%)



30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



N-type solar cell has no LID naturally which can increase power generation



Excellent low irradiance performance.




Better light trapping and current collection to improve module power output and reliability.



Industry leading lowest thermal co-efficient of power.



Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.




Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa).



100% triple EL test enabling remarkable reduction of hidden crack rate of modules

LINEAR PERFORMANCE WARRANTY

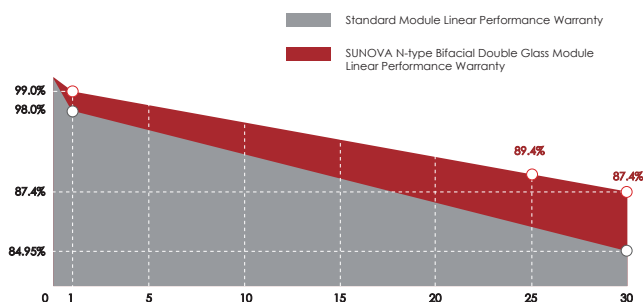

15 years

Product quality & process guarantee

30 years

Linear power guarantee

0.40%

Annual Degradation

COMPREHENSIVE CERTIFICATES



ISO 9001: Quality Management System


ISO 14001: Environmental Management System Standard

ISO 45001: International Occupational Health and Safety Assessment System Standard

SA 8000: 2014 Social Accountability Management System

* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

PERFORMANCE INSURANCE



* Optional performance warranty insurance. Please contact our local sales staff for more information.

ELECTRIC CHARACTERISTICS

Model of modules	SS-BG425-54MDH(T)		SS-BG430-54MDH(T)		SS-BG435-54MDH(T)		SS-BG440-54MDH(T)		SS-BG445-54MDH(T)	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — P_{mp} (W)	425	317	430	320	435	324	440	328	445	332
Open-circuit voltage — V_{oc} (V)	37.75	35.63	37.91	35.78	38.29	36.14	38.61	36.45	38.77	36.60
Short-circuit current — I_{sc} (A)	13.90	11.23	14.01	11.32	14.03	11.33	14.07	11.37	14.12	11.41
Maximum power voltage — V_{mp} (V)	31.48	29.47	31.70	29.67	32.01	29.97	32.27	30.21	32.48	30.41
Maximum power current — I_{mp} (A)	13.50	10.74	13.57	10.80	13.59	10.81	13.63	10.85	13.70	10.90
Module efficiency — η_m (%)	21.3		21.5		21.8		22.0		22.3	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (REFERENCE TO 13.5% IRRADIANCE RATIO)

Peak Power (P_{max}) (W)	471	476	482	488	493
Open Circuit Voltage (V_{oc}) (V)	37.75	37.91	38.29	38.61	38.77
Short Circuit Current (I_{sc}) (A)	15.41	15.53	15.54	15.59	15.65
MPP Voltage (V_{mp}) (V)	31.48	31.70	32.01	32.27	32.48
MPP Current (I_{mp}) (A)	14.96	15.03	15.06	15.11	15.18

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	1762 x 1134 x 30 mm
Weight	25.9 kg
Cell	108 cells, N-type Monocrystalline 182 x 93 mm
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Black anodized aluminum alloy
Junction box	IP68, 3 diodes
Output wire	4.0 mm ²
Wire length	300mm/1200mm/customized
Connector	MC4 Compatible
Packing Specification	31pcs/Pallet; 936 pcs/40'HQ


OPERATING PARAMETERS

Power tolerance (W)	(0,+5)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85 °C
Mechanical load	5400 Pa / 2400 Pa

TEMPERATURE RATINGS


Temperature coefficient (P_{max})	-0.30 %/°C
Temperature coefficient (V_{oc})	-0.26 %/°C
Temperature coefficient (I_{sc})	+0.046 %/°C
Nominal operating cell temperature	43±2 °C

MODULE DIMENSIONS (MM)

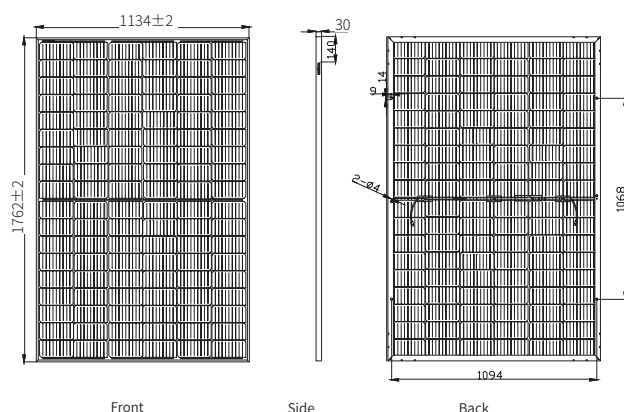


* The unma rance is ±1 mm
Length shown in mm

Characteristic Curves (425W)

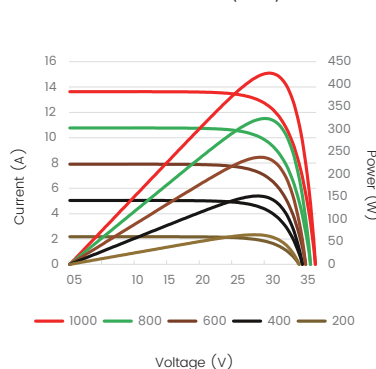

Temperature Dependence of I_{sc}, V_{oc}, P_{max}

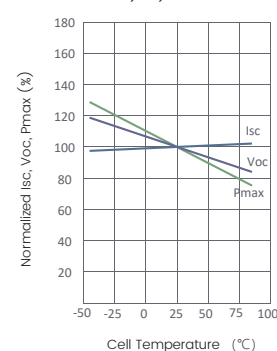

JAZON SOLAR DISTRIBUTIE
Koematen 33B
8331 TK Steenwijk Telefoon:
+31 (0) 521-344029
E-mail: info@jazon.nl

Web: www.sunova-solar.com

E-mail: info@sunova-solar.com

* The technical parameters contained in this datasheet may deviate slightly, Sunova Solar does not guarantee that they are completely accurate. Varying optional data could be for different regions or prices. Please contact commercial people for confirmation. Due to continuous innovation, research and development and product improvement, Sunova Solar reserves the right to adjust the information in this datasheet at any time without prior notice. The customer should obtain the latest version of datasheet when signing the contract and make it an integral part of the binding contract signed by both parties. The Chinese (or other language) translation files of this datasheet are for reference only. If there is any inconsistency between the English version and the Chinese version (or other language versions), the English version shall prevail.

